

# INDO-SPHERE SS-310

SS 310 is austenitic stainless steel is an economical and versatile corrosion resistant alloy suitable for a wide range of general-purpose applications.. Its chemical composition corresponds to UNS J94203 for use in additive manufacturing processes. Vacuum Induction Melting - Inert Gas Atomization process is used at INDO-MIM for manufacturing of powder. Our unique ASB technique improves powder sphericity, which enhances flowability in achieving consistent density and uniform build rates.

## Particle Size Distribution

Light scattering ( ASTM B822 / ISO 13320-1)				
Application	Size Range	D10%	D50%	D90%
MIM	<22µm	5.0 max	12.0 max	22.0 max
BJ	<25µm	5.5 max	13.5 max	25.0 max
LPBF	15 – 53µm	24.0 max	36.0 max	54.0 max


## Chemical Composition (weight %)

Element	Limits
Carbon	0.28-0.31
Silicon	0.80-1.10
Manganese	0.90 max
Phosphorous	0.030 max
Sulfur	0.015 max
Molybdenum	0.30 max
Chromium	24.25-26.00
Nickel	19.25-21.00
Niobium	1.25-1.50
Iron	Balance

## Physical Properties

Property	g/cc	Test Method
Tap Density	4.65 min	ASTM B527
True Density	7.70 min	ASTM B923

## Morphology

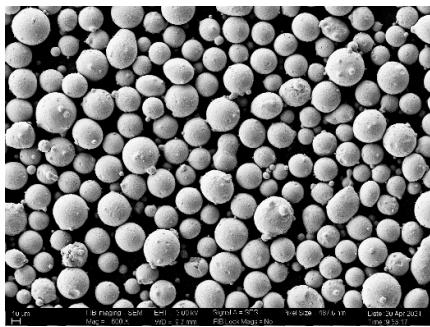

**Customization** on chemical composition & particle size can be made.

**Packing** with 10 / 50 / 100 kg containers & custom packing is possible.